


Typical Cross Section Vintage

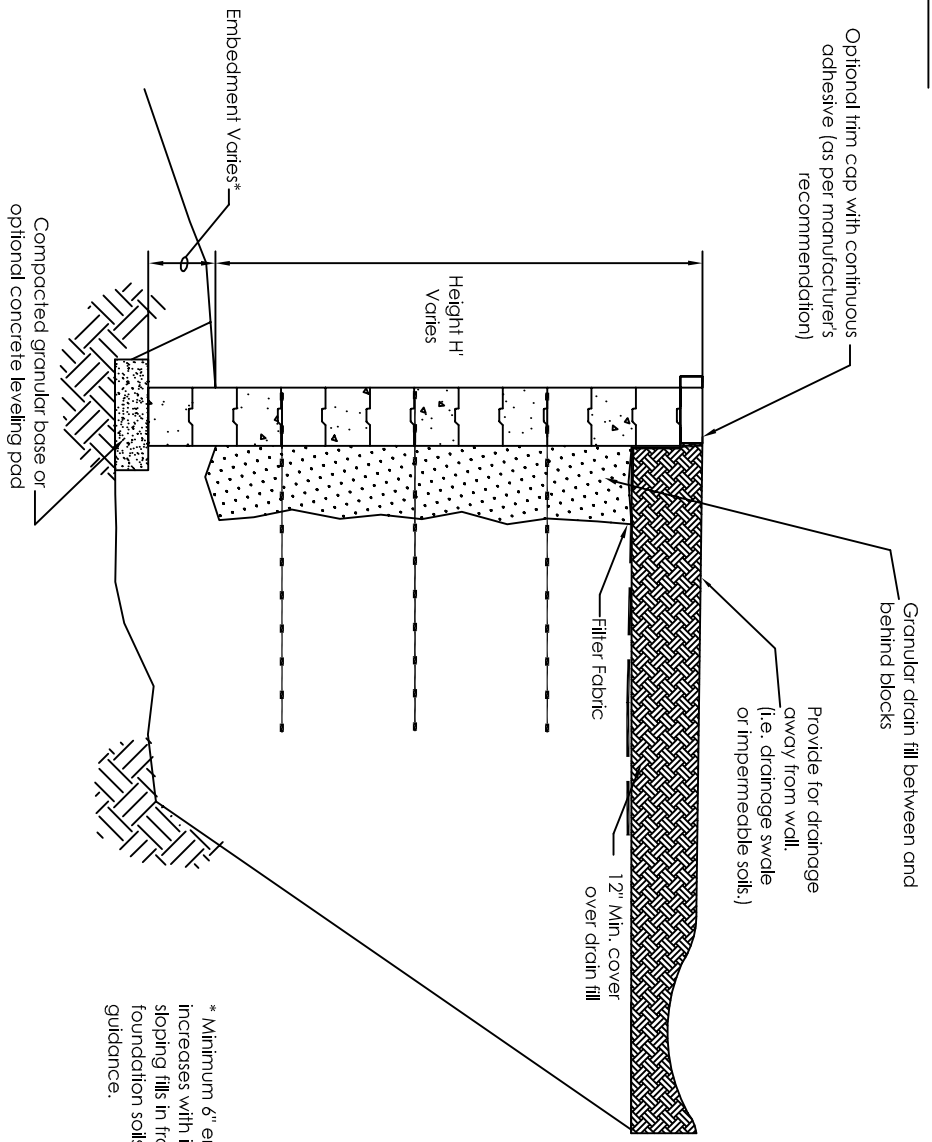

* Minimum 6" embedment. Embedment increases with increased wall heights, sloping fills in front and behind wall or poor foundation soils. Contact local engineer for guidance.

Scale: None

This drawing is furnished for preliminary design purposes only, and should not be used for final design drawings or construction drawings without the certification of a professional engineer registered in the state in which the wall will be constructed

No.	Date	Revision	By

ROCKWOOD
RETAINING WALLS
A Better Way

LEGEND	
	Impermeable Compacted Fill
	3/4" Crushed Stone Leveling Pad
	Geogrid

Project Name:	XX	Prepared For:	CCC
Project Location:	YY	Drawn By:	DDD
Drawing Description:	Typical Cross Section	Scale:	# or \$
Date:	MM/DD/YYYY	Project Number:	WWWPRO#